



2155-12



2155-30





2155-40



2155-60

测头类型

(mm)

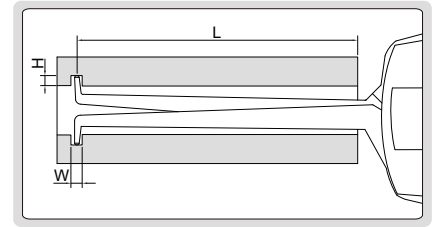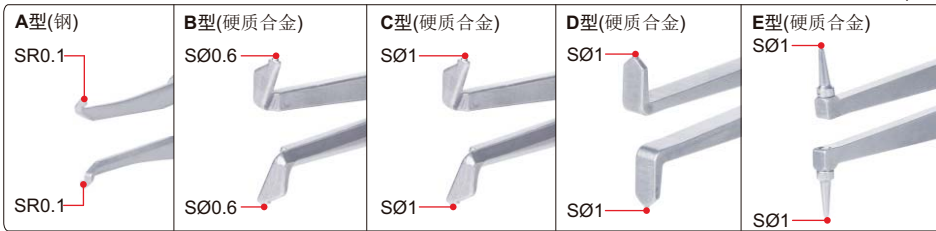


- 防尘/防水等级: IP67
- 自动寻找拐点(最小值)
- 模拟指针显示
- 带公差报警指示灯
- 可存储80个数值
- 按键功能: 相对/绝对测量转换, 最小值跟踪/数据保持, 设置公差, 设置初始值, 公/英制转换, 分辨率转换, 开/关
- 2节7号电池, 自动关机
- 数据接口
- 可选附件: 校对环规(型号6312), 数据传输线(型号7305-D01), 数据线转接口(型号7305-D-ADAPTER)

数据线转接口
7305-D-ADAPTER(选配)



数据传输线
7305-D01(选配)

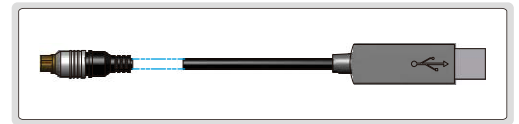

(mm)

型号	测量范围	分辨率	精度	重复性	测头类型	L	H	W
2155-12*	2.5-12.5mm	0.005mm/0.01mm	±0.015mm	0.005mm	A	<12	<0.7	>0.5
2155-15*	5-15mm	0.005mm/0.01mm	±0.015mm	0.005mm	B	<35	<2.3	>0.8
2155-30*	10-30mm	0.01mm/0.02mm	±0.03mm	0.01mm	C	<85	<5.2	>1.2
2155-40*	20-40mm	0.01mm/0.02mm	±0.03mm	0.01mm	D	<85	<7.0	>1.2
2155-50*	30-50mm	0.01mm/0.02mm	±0.03mm	0.01mm	D	<85	<7.0	>1.2
2155-60*	40-60mm	0.01mm/0.02mm	±0.03mm	0.01mm	E	<85	<8.3	>1.2
2155-70*	50-70mm	0.01mm/0.02mm	±0.03mm	0.01mm	E	<85	<8.3	>1.2

*带生产厂检验证书