



2155-12



2155-30




2155-40




2155-60

测头类型

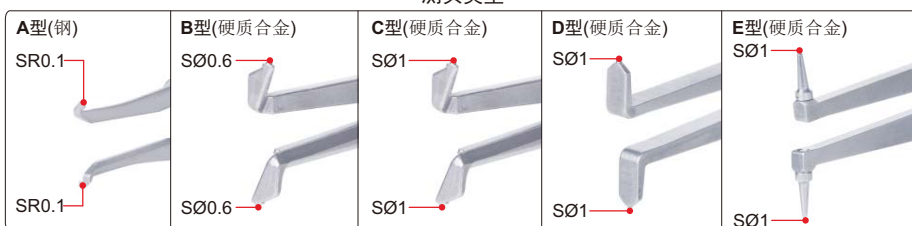

- 防尘/防水等级:IP67
- 自动寻找拐点(最小值)
- 模拟指针显示
- 按键功能:相对/绝对测量转换,最小值跟踪/数据保持,设置公差并亮灯提示,设置初始值,公/英制转换,分度值转换,开/关
- 2节7号电池,自动关机
- 数据接口
- 可选附件:校对环规(型号**6312**),数据传输线(型号**7305-D01**),数据线转接口(型号**7305-D-ADAPTER**)

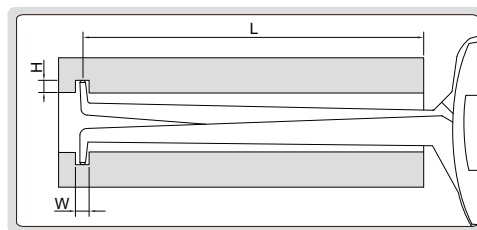

(mm)

型号	测量范围	分辨率	精度	重复性	测头类型	L	H	W
2155-12	2.5-12.5mm	0.005mm	0.015mm	0.005mm	A	<12	<0.7	>0.5
2155-15	5-15mm	0.005mm	0.015mm	0.005mm	B	<35	<2.3	>0.8
2155-30	10-30mm	0.01mm	0.03mm	0.01mm	C	<85	<5.2	>1.2
2155-40	20-40mm	0.01mm	0.03mm	0.01mm	D	<85	<7.0	>1.2
2155-50	30-50mm	0.01mm	0.03mm	0.01mm	D	<85	<7.0	>1.2
2155-60	40-60mm	0.01mm	0.03mm	0.01mm	E	<85	<8.3	>1.2
2155-70	50-70mm	0.01mm	0.03mm	0.01mm	E	<85	<8.3	>1.2