


可换头机械扭矩扳手

精度±3%

仅限于顺时针
方向使用




符合DIN ISO 6789, ASME B107.300-2010标准

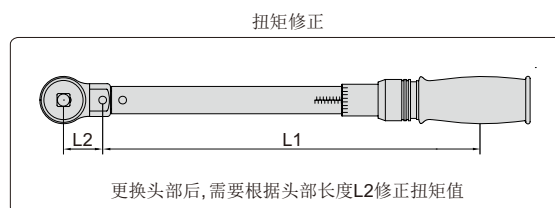

扭矩设定方法:



第一步: 解锁



第二步: 设置



第三步: 锁定

技术参数

型号	IST-6WM60	IST-6WM100	IST-6WM200	IST-6WM340	IST-6WM600
扭矩范围(顺时针)	10~60N.m	20~100N.m	40~200N.m	60~340N.m	100~600N.m
精度	±3%	±3%	±3%	±3%	±3%
分度值	0.5N.m	0.5N.m	1N.m	2N.m	5N.m
安装槽尺寸(A×B)	12×9mm	12×9mm	18×14mm	18×14mm	18×14mm
力臂长度(L1)	261mm	343mm	420mm	521mm	891mm
长度	306mm	403mm	484mm	585mm	988mm
重量	630g	1286g	1400g	1602g	5600g

可选配件

棘轮及扳头头部	见下页
---------	-----

待续



棘轮头部(可选)

型号	棘轮方头尺寸	适用的扳手
IST-6WM-R1	3/8"	IST-6WM60 IST-6WM100
IST-6WM-R2	1/2"	IST-6WM200 IST-6WM340
IST-6WM-R3	3/4"	IST-6WM600



开口扳手头部(可选)

型号	开口尺寸	适用的扳手
IST-6WM-K7	7mm	IST-6WM60 IST-6WM100
IST-6WM-K8	8mm	
IST-6WM-K9	9mm	
IST-6WM-K10	10mm	
IST-6WM-K11	11mm	
IST-6WM-K12	12mm	
IST-6WM-K13	13mm	
IST-6WM-K14	14mm	
IST-6WM-K15	15mm	
IST-6WM-K16	16mm	
IST-6WM-K17	17mm	
IST-6WM-K18	18mm	
IST-6WM-K19	19mm	
IST-6WM-K13A	13mm	
IST-6WM-K14A	14mm	
IST-6WM-K15A	15mm	
IST-6WM-K16A	16mm	
IST-6WM-K17A	17mm	
IST-6WM-K18A	18mm	
IST-6WM-K19A	19mm	
IST-6WM-K21A	21mm	
IST-6WM-K22A	22mm	
IST-6WM-K24A	24mm	



梅花扳手头部(可选)

型号	开口尺寸	适用的扳手	
IST-6WM-M7	7mm	IST-6WM60 IST-6WM100	
IST-6WM-M8	8mm		
IST-6WM-M10	10mm		
IST-6WM-M11	11mm		
IST-6WM-M12	12mm		
IST-6WM-M13	13mm		
IST-6WM-M14	14mm		
IST-6WM-M15	15mm		
IST-6WM-M16	16mm		
IST-6WM-M17	17mm		
IST-6WM-M18	18mm		
IST-6WM-M19	19mm		
IST-6WM-M21	21mm		
IST-6WM-M22	22mm		IST-6WM200 IST-6WM340 IST-6WM600
IST-6WM-M13A	13mm		
IST-6WM-M14A	14mm		
IST-6WM-M15A	15mm		
IST-6WM-M16A	16mm		
IST-6WM-M17A	17mm		
IST-6WM-M18A	18mm		
IST-6WM-M19A	19mm		
IST-6WM-M21A	21mm		