


可换头扭矩扳手套装


精度±3%

仅限于顺时针方向使用

检验证书



扭矩修正

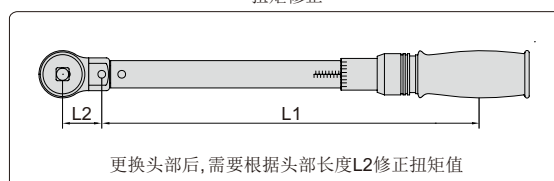

符合DIN ISO 6789, ASME B107.300-2010标准

扭矩设定方法:



技术参数

型号	IST-8WM10	IST-8WM20	IST-8WM60	IST-8WM100	IST-8WM200	IST-8WM340	IST-8WM400
扭矩范围(顺时针)	2 ~ 10N.m	4 ~ 20N.m	10 ~ 60N.m	20 ~ 100N.m	40 ~ 200N.m	60 ~ 340N.m	80 ~ 400N.m
精度	±3%	±3%	±3%	±3%	±3%	±3%	±3%
分度值	0.1N.m	0.1N.m	0.5N.m	0.5N.m	1N.m	2N.m	2N.m
安装槽尺寸(A×B)	12×9mm			18×14mm			
力臂长度(L1)	218mm	261mm	261mm	366mm	420mm	521mm	521mm
长度	263mm	306mm	306mm	430mm	484mm	585mm	585mm
重量	1264g	1372g	1372g	3712g	3825g	4047g	4047g

标准配置

型号	IST-8WM10	IST-8WM20	IST-8WM60	IST-8WM100	IST-8WM200	IST-8WM340	IST-8WM400
扳手	1个	1个	1个	1个	1个	1个	1个
棘轮头部	1个(1/4")	1个(1/4")	1个(3/8")	1个(3/8")	1个(1/2")	1个(1/2")	1个(1/2")
梅花扳手头部	3个(开口尺寸10, 13, 17mm)			—			
开口扳手头部	3个(开口尺寸10, 13, 17mm)			9个(开口尺寸13, 14, 15, 17, 19, 22, 24, 27, 30mm)			

英示

0512-68086660

0512-68085081

china@insize.com

www.insize.com.cn