



硬管内窥镜

IP67
防尘防水

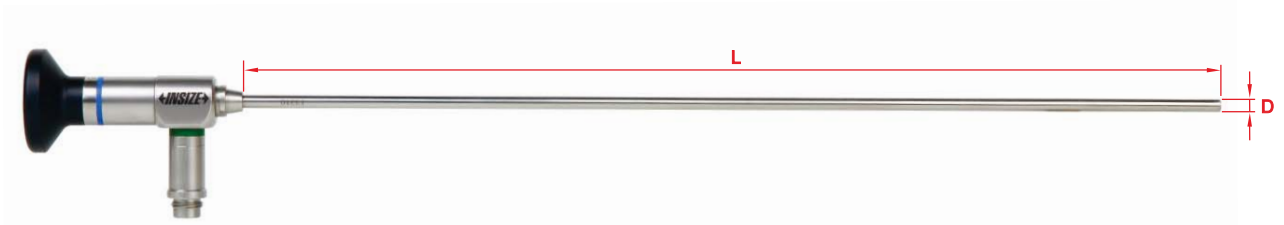

ISV-1H4300

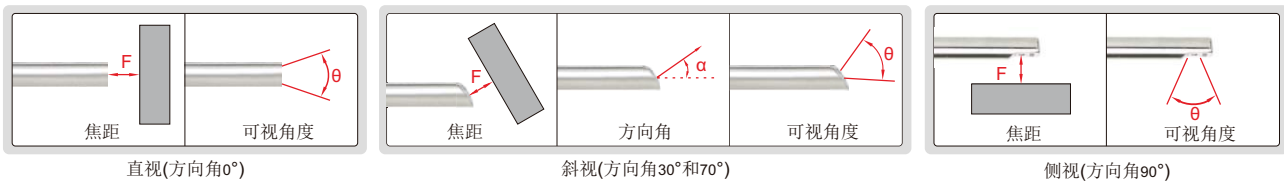

- 焦距2mm, 景深5 ~ 100mm
- 用于观察狭小空间和小孔内侧表面
- 镜头防尘防水等级: IP67, 可用于环境较为恶劣的场合, 如铸造车间、机加工现场等
- 镜头可在-10°C ~ 85°C的液体中使用
- 需另购LED手柄光源或可调式LED光源

技术参数

型号	镜管长度(L)	方向角(α)	镜头直径(D)	可视角度(θ)
ISV-1H4170	174mm	0°	4mm	≥60°
ISV-1H4173	174mm	30°		
ISV-1H4177	174mm	70°		
ISV-1H4179	166mm	90°		
ISV-1H4300	302mm	0°		
ISV-1H4303	302mm	30°		
ISV-1H4307	302mm	70°		
ISV-1H4309	297mm	90°		

型号	镜管长度(L)	方向角(α)	镜头直径(D)	可视角度(θ)
ISV-1H6200	209mm	0°	6mm	≥70°
ISV-1H6203	209mm	30°		
ISV-1H6207	209mm	70°		
ISV-1H6209	166mm	90°		
ISV-1H6320	328mm	0°		
ISV-1H6323	328mm	30°		
ISV-1H6327	328mm	70°		
ISV-1H6329	330mm	90°		



手柄LED光源(可选)



可调式LED光源(可选)



相机(可选)

可选配件

手柄LED光源	ISV-1HLED
可调式LED光源	ISV-1HLED1
相机	ISV-2CAM